
AURON LED

Slim face / Upper and lower illumination

A flat-faced aluminium LED skirting system with independent upper and lower light channels. Its 100 mm face creates a restrained wall-to-floor detail, with surface-mounted or flush integration into a coordinated wall build-up.



PRODUCT REFERENCE

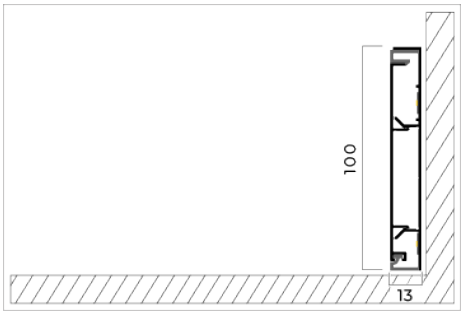

ORIGINAL SECTION / NOT TO SCALE

Dimensions & specification

Material	Aluminium; the technical datasheet lists EN AW 6463 T6 and EN AW 6061 T6. Confirm the alloy for the ordered section.
Section variants	100 x 13 mm (height x projection)
Length	2,500 / 2,700 mm - conflicting references; confirm before ordering
Published mass	0.846 kg/m
Published section perimeter	529 mm

Original source section drawing, not to scale. Read together with listed variants.

AURON LED

Specification & installation

Before specifying

- Length requires confirmation: the technical table and datasheet state 2,500 mm; the catalogue or descriptive text states 2,700 mm. These are conflicting references, not confirmed alternative lengths.

- The web description also converts 2,500 mm to 25 cm incorrectly. Confirm the supply length in writing.

- Corner guidance includes both mitred joints and closure pieces; approve the corner assembly before cutting.

Listed finishes

Matt silver anodised; RAL 9016 white / semi-gloss powder coat; RAL 7016 anthracite / semi-gloss powder coat; RAL 9005 black / semi-gloss powder coat

Finishes and matching components require confirmation in the quotation; screen images are not calibrated colour samples.

Installation

1. Fix the rear carrier to the wall and install the specified LED strips and driver before fitting the front cover and diffusers.

2. Upper and lower light channels can be used independently or together. For a flush installation, coordinate the wall finish over the profile.

3. The installation guide also permits a suitable silicone adhesive depending on the substrate. Confirm the fixing method and corner treatment for the project.

Components & accessories

Wall fixing brackets; Internal and external corner pieces; End caps; Upper and lower diffusers; Lower PVC gasket

LED integration

Designed for LED strip and driver integration. Strip width, voltage, power, IP rating and supplied electrical components are not specified; confirm the complete lighting assembly before ordering.

The technical documentation identifies transparent PVC diffuser strip. Confirm exact diffuser and LED compatibility for the selected assembly.

Reference status

Compiled from authorized product documentation. This reference records available information and unresolved differences; it is not a certified production drawing, warranty or stock offer. Agree the final alloy, dimensions, finish, supply scope and suitability before ordering.