
INTRA

Integrated wall finish / 10 mm tile interface

An aluminium skirting detail with a perforated anchoring flange for integration beneath the wall finish. The documented 10 mm tile interface creates a flush transition at the perimeter; the system is also described for adjoining carpeted floors.



PRODUCT REFERENCE

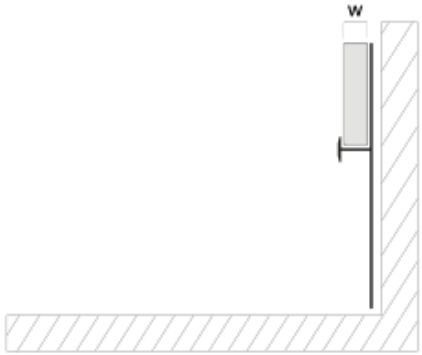

ORIGINAL SECTION / NOT TO SCALE

Dimensions & specification

Material	Aluminium; the technical datasheet lists EN AW 6463 T6 and EN AW 6061 T6. Confirm the alloy for the ordered section.
Section variants	10 mm tile interface
Length	2,500 mm
Published mass	0.331 kg/m
Published section perimeter	245 mm

Original source section drawing, not to scale. Read together with listed variants.

INTRA

Specification & installation

Before specifying

- The published 10 mm value relates to the tile interface. Overall section height and projection are not numerically specified in the web variation table; obtain the complete approved section before setting out.

Listed finishes

Matt silver anodised

Finishes and matching components require confirmation in the quotation; screen images are not calibrated colour samples.

Installation

1. Select the profile to suit the tile thickness. Embed the perforated flange into the prepared mortar bed, then apply additional mortar and align the wall tiles over the flange.

2. Mitre adjoining sections at 45° for inner and outer corners. Coordinate the finished wall and floor levels before installation.

Components & accessories

No separate accessory set is listed

Reference status

Compiled from authorized product documentation. This reference records available information and unresolved differences; it is not a certified production drawing, warranty or stock offer. Agree the final alloy, dimensions, finish, supply scope and suitability before ordering.