
HERITAGE

Classical contour / Concealed clip fixing

A non-illuminated aluminium skirting profile with a classical moulded face. Concealed wall brackets support the cover, while the rear space accommodates cable routing and matching pieces resolve corners and wall ends.



PRODUCT REFERENCE

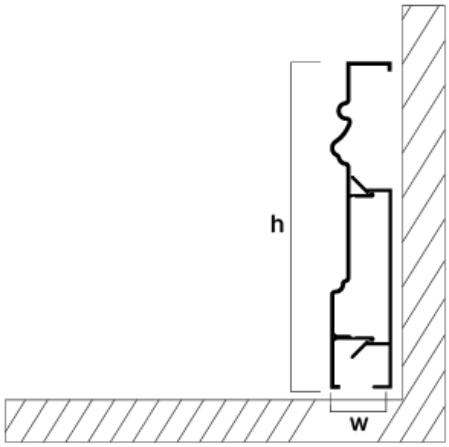

ORIGINAL SECTION / NOT TO SCALE

Dimensions & specification

Material	Aluminium; the technical datasheet lists EN AW 6463 T6 and EN AW 6061 T6. Confirm the alloy for the ordered section.
Section variants	100 x 20 mm (height x projection)
Length	2,500 mm
Published mass	0.503 kg/m
Published section perimeter	311 mm

Original source section drawing, not to scale. Read together with listed variants.

HERITAGE

Specification & installation

Before specifying

- The web finish selector lists four finishes; a catalogue edition limits this series to RAL 7016 and RAL 9016. Silver and black require explicit reconfirmation.

Listed finishes

RAL 9016 white / semi-gloss powder coat; RAL 7016 anthracite / semi-gloss powder coat

Finishes and matching components require confirmation in the quotation; screen images are not calibrated colour samples.

Installation

1. Fix wall brackets at the 500 mm intervals shown in the installation guide, with substrate-appropriate screws and plugs. Engage the front profile fully onto the brackets.

2. The installation guide shows fitted corner and end pieces. The descriptive text also mentions 45° cuts; confirm the corner assembly before fabrication.

Components & accessories

Wall fixing brackets; Internal and external corner pieces; End caps

Reference status

Compiled from authorized product documentation. This reference records available information and unresolved differences; it is not a certified production drawing, warranty or stock offer. Agree the final alloy, dimensions, finish, supply scope and suitability before ordering.