
AQUA

Adhesive fixing / Slim wall transition

A slim aluminium skirting section for bathroom and other interior wall-to-floor details. It bonds directly to the wall using a compatible silicone adhesive and is listed in 60 mm and 100 mm heights.



PRODUCT REFERENCE

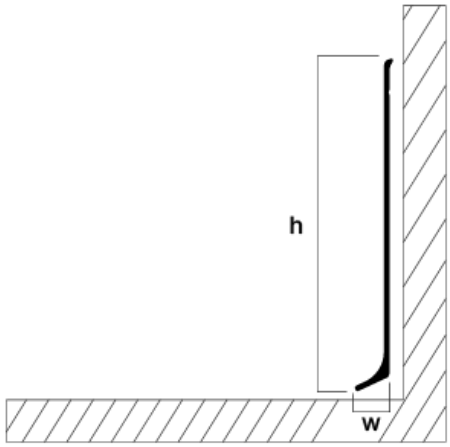

ORIGINAL SECTION / NOT TO SCALE

Dimensions & specification

Material	Aluminium; the technical datasheet lists EN AW 6463 T6 and EN AW 6061 T6. Confirm the alloy for the ordered section.
Section variants	60 mm height; 100 mm height
Length	2,500 / 2,700 mm - conflicting references; confirm before ordering
Published mass	0.296 kg/m (variant not identified)
Published section perimeter	132 mm (variant not identified)

Original source section drawing, not to scale. Read together with listed variants.

AQUA

Specification & installation

Before specifying

- Length requires confirmation: the technical table and datasheet state 2,500 mm; the catalogue or descriptive text states 2,700 mm. These are conflicting references, not confirmed alternative lengths.

- Projection is unresolved: the web variation table states 11 mm; the catalogue and datasheet drawing state 11.5 mm. Confirm before setting out.

- Mass and perimeter are not assigned to a height variant.

- The source describes curved-wall use but gives no minimum bend radius. This profile does not replace a waterproofing system.

Listed finishes

Matt silver anodised; RAL 9016 white / semi-gloss powder coat; RAL 7016 anthracite / semi-gloss powder coat; RAL 9005 black / semi-gloss powder coat

Finishes and matching components require confirmation in the quotation; screen images are not calibrated colour samples.

Installation

1. Apply two lines of suitable silicone adhesive to the rear and press against the prepared wall. The guide shows temporary tape at 500 mm intervals, removed the following day; follow the adhesive cure requirements.

2. Mitre both sections at 45° for internal and external corners. Coordinate all joints with the required waterproofing detail.

Components & accessories

Compatible silicone adhesive and temporary fixing tape (project-specified)

Reference status

Compiled from authorized product documentation. This reference records available information and unresolved differences; it is not a certified production drawing, warranty or stock offer. Agree the final alloy, dimensions, finish, supply scope and suitability before ordering.